


PolySprint[™] for Textile

TFL-15E20	TFL-22E26-2	TLA-30E30-2
TFL-15E25	TFL-22E26C-2	TA-S6

- ▶ Finger splice belting suitable for high speed applications and small pulley diameters.
- ▶ NITTA's original specially developed NBR covers with an improved and far better abrasion resistance.
- ▶ Stable coefficient of friction of the belt surface.
- ▶ Dimensional stability – Humidity has no affection to belt elongation and /or shrinkage.
- ▶ Save energy and low noise
- ▶ No experience needed or adhesive required for splicing
- ▶ Easy and quick joining using NITTA PolySprint tools.

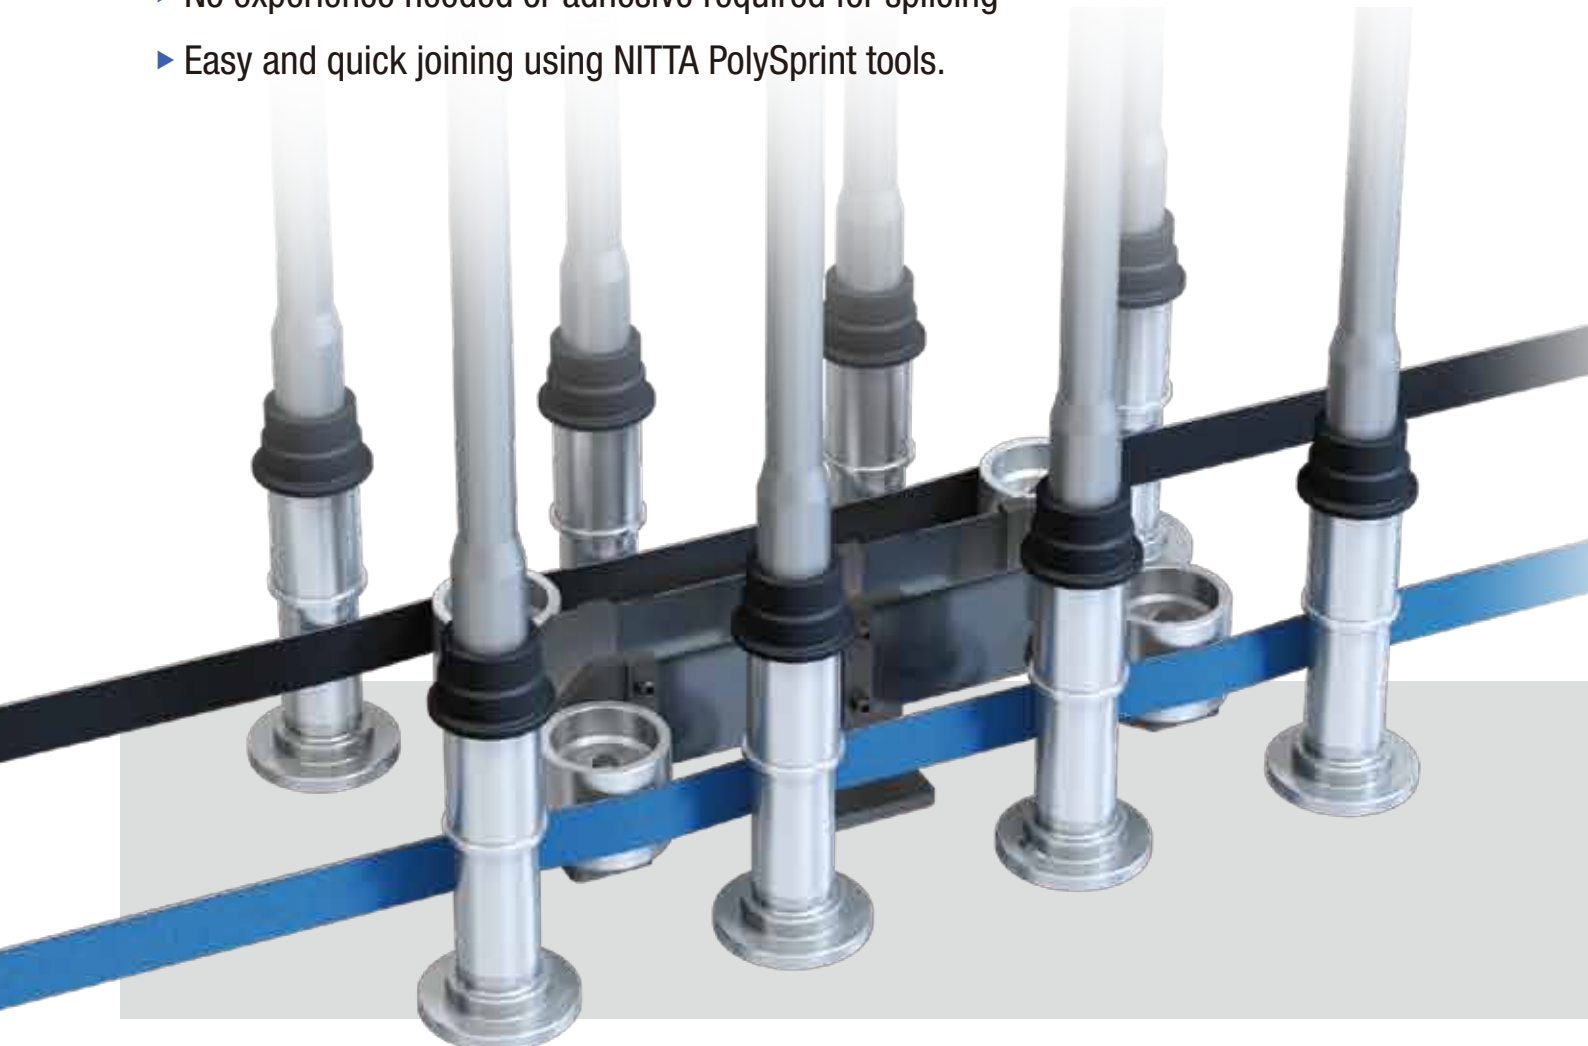

PolySprint Specifications

	Belt Type	Thickness (mm)	Surface material (Color)*1	Tension Member *2	Minimum Pulley Diameter (mm)	Tension @standard Elongation (N/mm) *3	Standard Elongation (%)	Recommend Elongation Range (%)	Temperature Range (°C)	Card	Draw Frame	Ring Spinning	OE Spinning	TFO	DTY	Covering	Cleaner	Circular Knitting	Finger Splice
PolySprint	TFL-15E20	2.0	NBR(Dark Blue)/ NBR(Black)	PE	40	15	1	0.5 ~ 2	0 ~ +60	•	•	•		•					•
	TFL-15E25	2.5	NBR(Dark Blue)/ NBR(Black)	PE	40	15	1	0.5 ~ 2	0 ~ +60	•	•	•	•	•					•
	TFL-22E26-2	2.6	NBR(Dark Blue)/ NBR(Black)	PE	50	22	1	0.5 ~ 2	0 ~ +60			•	•	•					•
	TFL-22E26C-2	2.6	NBR(Dark Blue)/ NBR(Gray)	PE	50	22	1	0.5 ~ 2	0 ~ +60					•		•			•
	TLA-30E30-2	3.0	NBR(Dark Blue)/ NBR(Dark Blue)	PE	70	30	1	0.5 ~ 2	0 ~ +60						•				•
	TA-S6	0.9	TPU(Blue)/ TPU(Black)	Knit	25	0.7	5	3 ~ 8	-20 ~ +60	•									

※All belt types listed above have antistatic properties.

*1 Depending on the application, top and bottom covers can be reversed.


*2 PE : Polyester

*3 Tension is measured after running for 200 hours.

NITTA CORPORATION

4-4-26 Sakuragawa Naniwa-ku, Osaka 556-0022 Japan
Phone:+81-6-6563-1225 Fax:+81-6-6563-1242

<http://www.nitta.co.jp>



NITTA CORPORATION OF AMERICA

7605 Nitta Drive, Suwanee, GA 30024, U.S.A.
Phone:+1-770-497-0212 Fax:+1-770-623-1398
<http://www.nitta.com>

NITTA CORPORATION OF HOLLAND B.V.

Berenkoog 25, 1822 B.H. Alkmaar, The Netherlands
Phone:+31-72-5622234 Fax:+31-72-5613238
<http://www.nitta.nl>

NITTA (SHANGHAI) MANAGEMENT CO., LTD

Room2705, Shenggao International Building, No.137 Xianxia Road, Shanghai 200051
Phone:+86-21-6229-6000 Fax:+86-21-6229-9606
<http://www.nitta-cn.com>

NITTA CORPORATION INDIA PVT LTD

Gat No.186, Village Fulgaon, Taluka Haveli, Pune, Maharashtra 412216, INDIA
Phone:+91-20-6731-3400 Fax:+91-20-6731-3401
<http://www.nitta.co.in>

NITTA CORPORATION KOREA OFFICE

Room710, 7F, ShinhanDM Bldg. Mapo-daero 25, Mapo-gu, Seoul, Korea
Phone:+82-2-3274-1252 Fax:+82-2-3274-1253
<http://www.nitta.kr>

NITTA INDUSTRIES EUROPE GmbH

Hansaallee 201, 40549 Dusseldorf, Germany
Phone:49-211-537535-0 Fax:+49-211-537535-35
<http://www.nitta.de>

NITTA CORPORATION OF SINGAPORE PTE LTD

120 Lower Delta Road, #05-07/08
Cendex Centre, Singapore 169208
Phone:+65-6438-8738 Fax:+65-6438-8793
<http://www.nitta.com.sg>
<Thai Liaison Office>Phone:+66-2797-0723
<Indonesia Liaison Office>Phone:+62-22-421-3146

TAIWAN NITTA FILTER CO., LTD.

Headquarters: Chia Hsin Building 10FL Room No. 1005, 96 Chung Shan North Road Section 2, Taipei, Taiwan, R.O.C.
Phone:+886-2-2581-6296 Fax:+886-3-469-0260
<http://www.nitta.com.tw>

NITTA BRASIL

Rua Francisco Mommenshon, 50B, Galpão 02
Laranjeiras, Caieiras, São Paulo, Brazil
Phone/Fax:+55-11-4441-2922
<http://www.nitta.com.br>

The specification is subject to change for improvement without notice.

15101000SU